

KYORITSU Clamp Adaptors

MODEL

8112BNC


• AC CLAMP ADAPTOR

Model 8112BNC is an AC clamp adaptor designed for use with oscilloscopes. Output cord has a BNC connector which enables direct observation of current waveform on oscilloscope. Refer to a diagram shown at left for application. Specifications are same as those for Model 8112.



Φ 8	MAX AC120A	200mA 1A→1V	2A 1A→100mV
20A 1A→10mV			

■ Example of Model 8112 BNC application

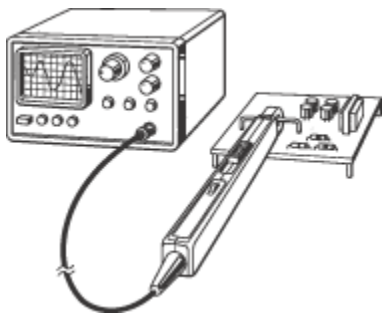

Range	Measuring Ranges	Output Voltage	Accuracy	Frequency Response
200mA	AC 0~500mA	AC1V/A (1000mA→1V)	±1.5%rdg±0.2mA	50Hz~1kHz
	AC 0~1000mA		±3%rdg±0.4mA	40Hz~10kHz
2A	AC 0~20A	AC100mV/A (20A→2V)	±1%rdg±1mA	40Hz~1kHz
			±1.5%rdg±2mA	1k~10kHz
20A	AC 0~20A	AC10mV/A (120A→1.2V)	±1%rdg±0.01A	40Hz~1kHz
	AC 20~60A		±2.5%rdg	50Hz~10kHz
	AC 60~120A		±2.5%rdg	100Hz~10kHz
Conductor Size		Ø8mm max.		
Frequency Response		30Hz~100kHz (-3dB)		
Withstand Voltage		500V AC for 1 minute		
Dimensions		153(L) × 18(W) × 23(D)mm		
Weight		100g approx.		
Accessories		9057 (Carrying Case) Instruction Manual		